

Stock# 20148820650



7400 SBA 4x2


Sales Proposal For:
Truck Customs

Presented By:
ROBERTS INTL TRUCKS

Prepared For:
Truck Customs
Chris Walker
1020 Franke Industrial Dr.
Augusta, GA 30909-9101
(706)840 - 3723
Reference ID: 7400 pickup

Presented By:
ROBERTS INTL TRUCKS
MITCHELL M CASON
300 LONGWOOD DRIVE
P.O. BOX 1630
RICHMOND HILL GA 31324 - 1630
(912)756-4666

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

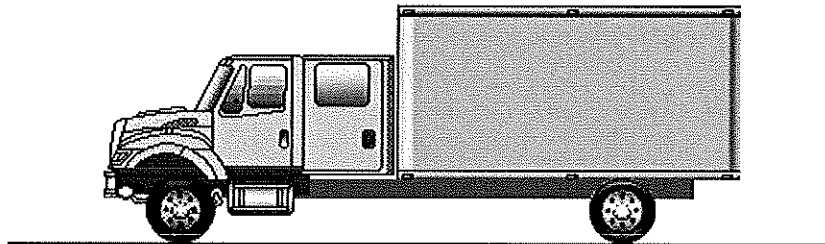

Model Profile
2014 7400 SBA 4X2 (SA625)

APPLICATION:	Dry Van
MISSION:	Requested GVWR: 32900. Calc. GVWR: 31000 Calc. Start / Grade Ability: 40.40% / 3.44% @ 55 MPH Calc. Geared Speed: 77.4 MPH 8.99 MPG @ 55 MPH
FUEL ECONOMY:	
DIMENSION:	Wheelbase: 230.00, CA: 119.00, Axle to Frame: 37.00
ENGINE, DIESEL:	{MaxxForce 9} EPA 10, 330 HP @ 2000 RPM, 950 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed
TRANSMISSION, AUTOMATIC:	{Allison 3500_RDS_P} 4th Generation Controls; Wide Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-12-143A} Wide Track, I-Beam Type, 12,000-lb Capacity
AXLE, REAR, SINGLE:	{Meritor MS-19-14X-3DCR} Single Reduction, 19,000-lb Capacity, R Wheel Ends, Driver Controlled Locking Differential Gear Ratio: 5.29
CAB:	Conventional 6-Man Crew Cab
TIRE, FRONT:	(2) 385/65R22.5 G296 MSA (GOODYEAR) 488 rev/mile, load range J, 18 ply
TIRE, REAR:	(4) 11R22.5 G182 RSD (GOODYEAR) 496 rev/mile, load range H, 16 ply
SUSPENSION, REAR, AIR, SINGLE:	{International} Ride Optimized Suspension (IROS); 20,000-lb Capacity, 9.25" Ride Height, With Shock Absorbers
PAINT:	Cab schematic 100GN Location 1: 8707, Silver Metallic (Prem) Chassis schematic N/A

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
SA62500	Base Chassis, Model 7400 SBA 4X2 with 230.00 Wheelbase, 119.00 CA, and 37.00 Axle to Frame.	6958/3442	10400
1570	TOW HOOK, FRONT (2) Frame Mounted	8/0	8
1CBU	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm); 480.0" (12192) Maximum OAL	160/152	312
1LEH	LICENSE PLATE HOLDER Single Plate, Swing Type, Mounted Below Front Bumper	3/0	3
1LNN	BUMPER, FRONT Full Width, Aerodynamic, Chrome Plated Steel; 0.142" Material Thickness	7/0	7
1WGS	WHEELBASE RANGE 189" (480cm) Through and Including 256" (650cm)	0/0	0
1WMS	BUMPER EXTENSION, FRONT 2.0"	0/0	0
1WTU	FRAME ADDITION, FRONT 1" Integral; Increases BBC, BA and OAL Vehicle Dimensions By 1"	4/0	4
2ARW	AXLE, FRONT NON-DRIVING {Meritor MFS-12-143A} Wide Track, I-Beam Type, 12,000-lb Capacity	0/0	0
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
3ADC	SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf; 12,000-lb Capacity; With Shock Absorbers	9/0	9
	<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free		
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : DUST SHIELDS, FRONT BRAKE : DUST SHIELDS, REAR BRAKE : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE Bendix On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4		
	<u>Notes</u> : Rear Axle is Limited to 23,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle/Suspension Ordered.		
4732	DRAIN VALVE {Berg} Manual; With Pull Chain, for Air Tank	0/0	0
	<u>Includes</u> : DRAIN VALVE Mounted in Wet Tank		

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)	0/0	0
4EBS	AIR DRYER {Bendix AD-9} With Heater <u>Includes</u> : AIR DRYER LOCATION Inside Left Rail, Back of Cab	0/0	0
4ESX	BRAKE CHAMBERS, FRONT AXLE {Haldex} 20 SqIn	0/0	0
4EVL	BRAKE CHAMBERS, REAR AXLE {Haldex GC3030LHDHO} 30/30 Spring Brake <u>Includes</u> : BRAKE CHAMBERS, SPRING (2) Rear Parking; WITH TRUCK BRAKES: All 4x2, 4x4; WITH TRACTOR BRAKES: All 4x2, 4x4; 6x4 & 6x6 with Rear Tandem Axles Less Than 46,000-lb. or GVWR Less Than 54,000-lb.	0/0	0
4JCJ	BRAKES, FRONT, AIR CAM S-Cam; 16.5" x 5.0"; Includes 20 Sq. In. Long Stroke Brake Chambers <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.	0/0	0
4NDB	BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake <u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.	0/0	0
4SBC	AIR COMPRESSOR {Bendix Tu-Flo 550} 13.2 CFM Capacity	0/0	0
5710	STEERING COLUMN Tilting and Telescoping	10/0	10
5CAN	STEERING WHEEL 2-Spoke; 18" Diam., Black, Leather Wrapped	1/0	1
5PSA	STEERING GEAR {Sheppard M-100} Power	0/0	0
7BDA	EXHAUST SYSTEM Single, Horizontal, Aftertreatment Device Frame Mounted Right Side Back of Cab, Includes Horizontal Tail Pipe <u>Includes</u> : EXHAUST HEIGHT 10' Exhaust Height - Based on Empty Chassis with Standard Components (+ or - 1" Height) : NOTE: The Horizontal Tailpipe Includes a Temperature Control Device	0/0	0
7SCZ	ENGINE EXHAUST BRAKE for MaxxFoRce I6 Engines, Electronically Activated	0/0	0
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment <u>Includes</u> : BATTERY BOX Steel with Plastic Lid : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : FUSES, ELECTRICAL SAE Blade-Type : HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : HEADLIGHTS (2) Sealed Beam, Round, with Chrome Plated Bezels : HORN, ELECTRIC Single : JUMP START STUD Located on Positive Terminal of Outermost Battery : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : RUNNING LIGHT (2) Daytime, Included With Headlights	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: STARTER SWITCH Electric, Key Operated : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature : TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted : WIRING, CHASSIS Color Coded and Continuously Numbered		
8518	CIGAR LIGHTER Includes Ash Cup	1/0	1
8540	HORN, ELECTRIC (2)	2/0	2
8718	POWER SOURCE Cigar Type Receptacle without Plug and Cord	1/0	1
8787	RADIO Accommodation Package; Less Radio, With Wiring and Antenna, Includes Multiple Speakers <u>Includes</u> : SPEAKERS IN CAB (2) Dual-Cone with Deluxe Interior : SPEAKERS IN CAB (4) Coaxial with Premium Interior	2/0	2
8GGZ	ALTERNATOR {Leece-Neville LBP2224H} Brush Type; 12 Volt 120 Amp. Capacity, Pad Mount	0/0	0
8HAB	BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	2/0	2
8MEZ	BATTERY SYSTEM {International} Maintenance-Free, (2) 12-Volt 1850CCA Total	5/1	6
8RBK	CB ANTENNA (2) {Pana-Pacific} Full Wave; 4.0' Length Includes "International" Name on Top	3/0	3
8RCB	CB RADIO Accommodation Package; Header Mounted; Feeds From Accessory Side of Ignition Switch; Includes Power Source and Two Antenna Bases With Wiring <u>Notes</u> : NOT INCLUDED: Antenna	2/0	2
8WBW	JUMP START STUD Remote Mounted <u>Includes</u> : JUMP START STUD Mounted to Battery Box	2/0	2
8WCL	HORN, AIR Black, Single Trumpet, Air Solenoid Operated	0/0	0
8WMA	SWITCH, TOGGLE, FOR WORK LIGHT Lighted; on Instrument Panel and Wiring Effects for Customer Furnished Back of Cab Light	2/1	3
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade	0/0	0
8WPP	ENGINE SHUTDOWN Automatic; With 30 Second Delay, With International Engines	1/0	1
8WTK	STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt; less Thermal Over-Crank Protection	0/0	0
8WWJ	INDICATOR, LOW COOLANT LEVEL With Audible Alarm	1/0	1

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III With Trip Indicators, Replaces All Fuses Except For 5-Amp Fuses	0/0	0
9HAD	GRILLE Chrome	0/0	0
9HAN	INSULATION, UNDER HOOD for Sound Abatement	10/0	10
9HBN	INSULATION, SPLASH PANELS for Sound Abatement	2/0	2
9WBM	FRONT END Tilting, Fiberglass, With Three Piece Construction, Sloped Front	-66/-4	-70
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "GN"		
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10769	PAINT CLASS Premium Color	0/0	0
11001	CLUTCH Omit Item (Clutch & Control)	-66/-9	-75
12712	OIL FILTER, ENGINE {Hudgins Model 960 Spinner}	26/-1	25
12NUW	ENGINE, DIESEL {MaxxForce 9} EPA 10, 330 HP @ 2000 RPM, 950 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed	51/2	53
	<u>Includes</u> : AIR COMPRESSOR AIR SUPPLY LINE Naturally-Aspirated (Air Brake Chassis Only) : ANTI-FREEZE Red Shell Rotella Extended Life Coolant; -40 Degrees F/ -40 Degrees C; for MaxxForce Engines : COLD STARTING EQUIPMENT Intake Manifold Electric Grid Heater with Engine ECM Control : CRUISE CONTROL Electronic; Controls Integral to Steering Wheel : ENGINE OIL DRAIN PLUG Magnetic : ENGINE SHUTDOWN Electric, Key Operated : FUEL FILTER Included with Fuel/Water Separator : FUEL/WATER SEPARATOR Fuel/Water Separator and Fuel Filter in a Single Assembly; With Water-in-Fuel Sensor; Engine Mounted : GOVERNOR Electronic : OIL FILTER, ENGINE Spin-On Type : WET TYPE CYLINDER SLEEVES		
12THT	FAN DRIVE {Horton Drivemaster} Direct Drive Type, Two Speed With Residual Torque Device for Disengaged Fan Speed	9/0	9
	<u>Includes</u> : FAN Nylon		
12UAU	RADIATOR Aluminum; 2-Row, Cross Flow, Over Under System, 1045 SqIn Louvered, with 373 SqIn CAC, with 369 SqIn LTR, with In-Tank Transmission Oil Cooler	14/2	16
	<u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber		
12UXE	FEDERAL EMISSIONS for 2010; MaxxForce 9 & 10 Engines	0/0	0
12VBR	AIR CLEANER With Service Protection Element	10/0	10

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	<u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted		
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel	0/0	0
12VZA	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls; With Ignition Switch Control for MaxxFox post 2007 Emissions Electronic Engines	0/0	0
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted	29/-2	27
12WZE	EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Idle Regulations	0/0	0
12XAN	OBD COMPLIANCE for 2013 OBD (On Board Diagnostics)	0/0	0
13AJN	TRANSMISSION, AUTOMATIC {Allison 3500_RDS_P} 4th Generation Controls; Wide Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.	189/59	248
	<u>Includes</u> : OIL FILTER, TRANSMISSION Mounted on Transmission : TRANSMISSION OIL PAN Magnet in Oil Pan		
13WBL	TRANSMISSION SHIFT CONTROL {Allison} Push-Button Type; for Allison 3000 & 4000 Series Transmission	0/0	0
13WLP	TRANSMISSION OIL Synthetic; 29 thru 42 Pints	0/0	0
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks, Construction	0/0	0
13WYL	SHIFT CONTROL PARAMETERS Allison Performance Programming in Primary and Allison Economy Programming in Secondary	0/0	0
14899	SUSPENSION AIR CONTROL VALVE Pressure Release Control In Cab	5/3	8
14ANM	AXLE, REAR, SINGLE {Meritor MS-19-14X-3DCR} Single Reduction, 19,000-lb Capacity, R Wheel Ends, Driver Controlled Locking Differential . Gear Ratio: 5.29	0/31	31
	<u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires. : When Specifying Axle Ratio, Check Performance Guidelines and TCAPE for Startability and Performance		
14TBJ	SUSPENSION, REAR, AIR, SINGLE {International} Ride Optimized Suspension (IROS); 20,000-lb Capacity, 9.25" Ride Height, With Shock Absorbers	0/-36	-36
	<u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.		
14WAS	SUSPENSION LEVELING VALVE Dual Height; One Additional, for Air Ride Suspension	0/3	3
14WLB	AXLE, REAR, LUBE {EmGard 75W-90} Synthetic Oil; 30 thru 39.99 Pints	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
15DMV	FUEL TANK (2) Top Draw; D Style, Non Polished Aluminum, 70 U.S. Gal., 265L, Total Capacity 140 U.S. Gal., 530L; 19" Tank Depth, Mounted Under Cab Left and Right Side	41/18	59
16196	CAB Conventional 6-Man Crew Cab	281/73	354
	<u>Includes</u> : ARM REST (2) Molded Plastic; One Each Door : CLEARANCE/MARKER LIGHTS (5) Flush Mounted : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel : DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side : GRAB HANDLE, CAB INTERIOR (4) Two Each Side, Rear Door Mounted at Hinge Side and "C" Pillar Mounted : INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color : STEP (8) Two Steps Per Door		
	<u>Notes</u> : 43.9" CA Loss		
16HBA	GAUGE CLUSTER English With English Electronic Speedometer	0/0	0
	<u>Includes</u> : GAUGE CLUSTER (6) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter, Washer Fluid Level : ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout : WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)		
16HGG	GAUGE, OIL TEMP, ENGINE	1/0	1
16HGH	GAUGE, OIL TEMP, ALLISON TRAN	1/0	1
16HKA	IP CLUSTER DISPLAY Omit Display of Fault Codes in Instrument Cluster and Disable Blink Codes, Requires Service Tool to Retrieve and View Fault Code	0/0	0
16JNT	SEAT, DRIVER {National 2000} Air Suspension, High Back With Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, With 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust	30/9	39
	<u>Includes</u> : SEAT BELT 3-Point, Lap and Shoulder Belt Type		
16RPV	SEAT, PASSENGER {National 2000} Air Suspension, High Back With Integral Headrest, Vinyl, Isolated, 1 Chamber Lumbar, 2 Position Front Cushion Adjustment, -3 to +14 Degree Back Adjust	62/18	80
	<u>Includes</u> : SEAT BELT 3-Point, Lap and Shoulder Belt Type		
16RZD	SEAT, REAR {International} BENCH; Full Width; Vinyl, With Fixed Back and Two Integral Outboard Headrests	63/18	81
	<u>Includes</u>		

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: SEAT BELT (3) Two 3-Point Shoulder Belts for Driver and Outer Passenger and One 2-Point Lap Belt for Center Passenger		
16SDC	GRAB HANDLE (2) Chrome Towel Bar Type With Anti-Slip Rubber Inserts; for Cab Entry, Mounted Left and Right, Each Side at "B" Pillar	6/0	6
16SDD	GRAB HANDLE, ADDITIONAL EXT (2) Chrome; Towel Bar Type With Anti-Slip Rubber Inserts; Mounted Left and Right Side on Exterior, Rear of Rear Doors, With Crew Cab	5/0	5
16SDU	MIRRORS (2) {Lang Mekra} Styled; Rectangular, 7.09" x 15.75" & Integral Convex Both Sides, 102" Inside Spacing, Breakaway Type, Heated Heads Thermostatically Controlled, Power Both Sides, Clearance Lights LED, Bright Finish Heads & Brackets	8/0	8
16VCN	KEYLESS ENTRY SYSTEM REMOTE With Panic Alarm and Horn Beep Lock Confirmation, With Auxiliary Button for Work Light Function Includes One Key Fob	1/0	1
16WCT	AIR CONDITIONER {Blend-Air} With Integral Heater & Defroster	42/5	47
	<u>Includes</u> : HEATER HOSES Premium : HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps : REFRIGERANT Hydrofluorocarbon HFC-134A		
16WJS	INSTRUMENT PANEL Center Section, Flat Panel	0/0	0
16WJV	WINDOW, POWER (4) And Power Door Locks, Front and Rear Doors, Left and Right, Includes Express Down Feature	10/0	10
16WKY	HVAC FRESH AIR FILTER	0/0	0
16WSJ	CAB INTERIOR TRIM Premium; for Crew Cab	0/0	0
	<u>Includes</u> : "A" PILLAR COVER Molded Plastic : CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering : CAB SOUND INSULATION Includes Dash and Engine Cover Insulators : CAB, INTERIOR TRIM, CLOSEOUT Lower Dash Closeout Panel; Molded Plastic; Under Instrument Panel Driver Side : CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets, CB Radio Pocket, Speakers, and Reading Lights : COURTESY LIGHT (4) Mounted In Front and Rear Map Pockets - Left and Right Sides : DOOR TRIM PANELS with Cloth Insert on Bolster Driver and Passenger Doors : FLOOR COVERING Rubber, Black : GAUGE, TEMPERATURE, AMBIENT Includes Wiring and Sensor With Display Unit Mounted in Cluster : HEADLINER Soft Padded Cloth : INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section : STORAGE POCKET, DOOR (2) Molded Plastic (Carpet Texture), Full-Length; Driver and Passenger Doors : SUN VISOR (3) Padded Vinyl: 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side		
16WSK	CAB REAR SUSPENSION Air Bag Type	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
16XWD	SUNSHADE, EXTERIOR Aerodynamic, Painted Roof Color; Includes Integral Clearance/Marker Lights	15/2	17
27DHJ	WHEELS, FRONT DISC; 22.5" Polished Aluminum, 10-Stud (285.75MM BC) Hub Piloted, Flanged Nut, Metric Mount, 12.25 DC Rims; With Steel Hubs	101/0	101
	<u>Notes</u> : Aluminum Wheels not Painted or Coated : Compatible Tire Sizes: 385/65R22.5, 425/65R22.5		
28DMC	WHEELS, REAR DUAL DISC; 22.5" Polished Aluminum, 10-Stud (285.75MM BC) Hub Piloted, Flanged Nut, Metric Mount, 8.25 DC Rims; With Steel Hubs	0/-120	-120
	<u>Notes</u> : Aluminum Wheels not Painted or Coated : Compatible Tire Sizes: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5 : Polished Surface Outside Dual Only		
60AAA	BDY INTG, REMOTE POWER MODULE Mounted Under Cab or On Battery Box; Up to 6 Outputs & 6 Inputs, Max. 20 amp. per Channel, Max. 80 amp. Total (Includes 1 Switch Pack With Latched Switches)	4/0	4
7382130121	(4) TIRE, REAR 11R22.5 G182 RSD (GOODYEAR) 496 rev/mile, load range H, 16 ply	0/88	88
7702658113	(2) TIRE, FRONT 385/65R22.5 G296 MSA (GOODYEAR) 488 rev/mile, load range J, 18 ply	96/0	96
	Cab schematic 100GN Location 1: 8707, Silver Metallic (Prem) Chassis schematic N/A		
	Total Component Weight:	8164/3755	11919

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Factory List Prices:		
Product Items	\$121,408.00	
Service Items	\$0.00	
Total Factory List Price Including Options:		\$121,408.00
Freight	\$1,975.00	
Total Freight:		\$1,975.00
Total Factory List Price Including Freight:		\$123,383.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.